


Technical Product Specification

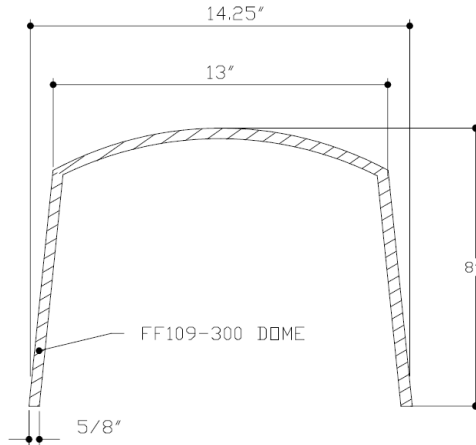

Model Number	Inside Height	Outside Diameter
FF109-300	7 3/8"	14 1/4"

Performance Data

For Use:

- UL Classified to maintain the fire rating (1 hour) for the following fire-rated floor/ceiling assemblies: L500 series



CLASSIFIED FOR FIRE RESISTANCE
FIRE RESISTANCE CLASSIFICATION
SEE UL FIRE RESISTANCE DIRECTORY

General Information

Benefits:

- 60 minute protection.
- Fits most popular IC rated fixtures.
- For use with recessed incandescent, fluorescent or LED light fixtures.
- Can be used in L500 floor/ceiling assemblies.
- Lightweight (approx. 1.5 lbs).
- Easy Installation - can be fitted in seconds - no screws, drilling or additional sealant required.
- Flexible material enables the cover to be fitted around obstacles or retro-fitted.
- Enhances the acoustic protection of the ceiling.
- Maintenance free.



The FF109-300 UL Fire Rated cover is a dome-shaped cover which has been designed to help maintain the integrity of fire rated ceilings for one hour when using recessed light fixtures.

The unique design gives the architect, specifier and installer more freedom in fixture selection as the covers are suited to a wide range of recessed lights.

