


Technical Product Specification

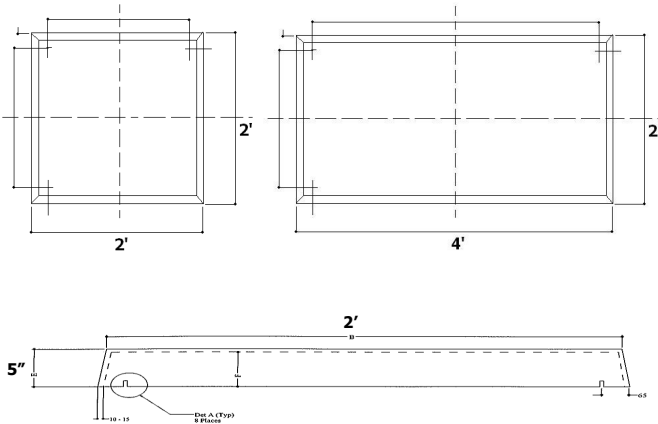

Model Number	Inside Height	Outside Width	Outside Length
FF130-2'x2'	5"	27"	29"
FF130-2'x4'	5"	28"	52"

Performance Data

For Use:

- UL Classified to maintain the fire rating (1 hour) for the following fire-rated assemblies: A202, D203, D216, D219, G205, G208, G218, G252, G255, G256, G262, G264, J201, J202, L006, L201, L202, L206, L209, L210, P202, P204, P206, P207, P210, P211, P213, P214, P216, P225, P227, P228, P229, P230, P231, P235, P238, P242, P246, P250, P251, P254, P255, P259, P260, P261, P264, P265, P267, P268, P269



CLASSIFIED FOR FIRE RESISTANCE
FIRE RESISTANCE CLASSIFICATION
SEE UL FIRE RESISTANCE DIRECTORY

General Information

Benefits:

- 60 minute protection.
- Fits most popular fluorescent fixtures.
- Suitable for lay-in tile ceilings.
- Lightweight (approx. 5 and 10 lbs).
- Easy Installation - can be fitted in seconds - no screws, drilling or additional sealant required.
- Enhances the acoustic protection of the ceiling.
- Reduces heat loss through the fixture.
- Maintenance free.
- Cable entry points can be made anywhere on the top and sides for ease of wiring of the fixture.



The FF130 Luminaire Covers are UL fire rated enclosures designed to protect recessed luminaires, troffers and fluorescent fixtures.

The covers are ready to install with no assembly required and can even be retrofitted into position due to their flexible and durable design.

The FF130 Cover can be folded to ease installation in restricted spaces.

