


To be used as a single product or in combination with a TENMAT fire protection product

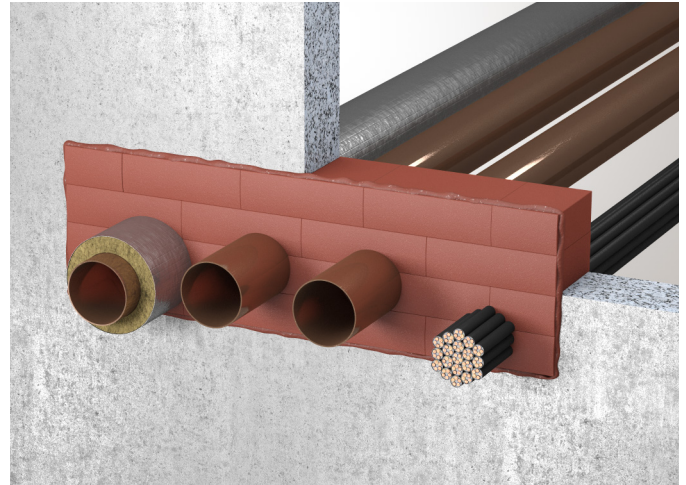

The FF360 Fire Protection Foam is a UL classified, **two-component intumescent foam** that can be used in combination with the FF260 Blocks or FF160 Plugs to seal wall and ceiling openings. FF360 is suitable for irregular or **hard-to-access openings** and can also be used as a **single product solution**.

Key Benefits

- ⇒ Fire tested and rated
- ⇒ Easy Retroactive Installation
- ⇒ **Cost-effective**
- ⇒ Easy application
- ⇒ Suitable for openings that are difficult to access or that are irregular
- ⇒ Fast and clean work
- ⇒ Suitable for large and medium openings with a mix of penetrating elements
- ⇒ Flexible
- ⇒ Single product solution
- ⇒ **UL Classified**

Approvals

- C-AJ-0178 Blank opening in solid wall or floor
- C-AJ-1744 Metal pipe in solid wall or floor
- C-AJ-3379 Cables in solid wall or floor
- C-AJ-4116 Cable tray with cables in solid wall and floor
- C-AJ-5442 Insulated metal pipe in solid wall or floor
- C-AJ-8319 Mixed penetration seal in solid wall or floor
- C-AJ-8321 Mixed penetration seal in solid wall or floor
- W-L-0061 Blank opening in drywall
- W-L-4103 Cable tray with cables in drywall

